

# Geometric Objects and Transformation

---

Fall 2021


10/5/2021

Kyoung Shin Park  
Computer Engineering  
Dankook University

# RHS Coordinate Systems

---

- Right Hand Coordinate System (RHS) –  $z+$  coming out of the screen
- Counter clockwise rotation
- If X-axis rotation, Y- $\rightarrow$ Z rotation is positive
- If Y-axis rotation, Z- $\rightarrow$ X rotation is positive
- If Z-axis rotation, X- $\rightarrow$ Y rotation is positive

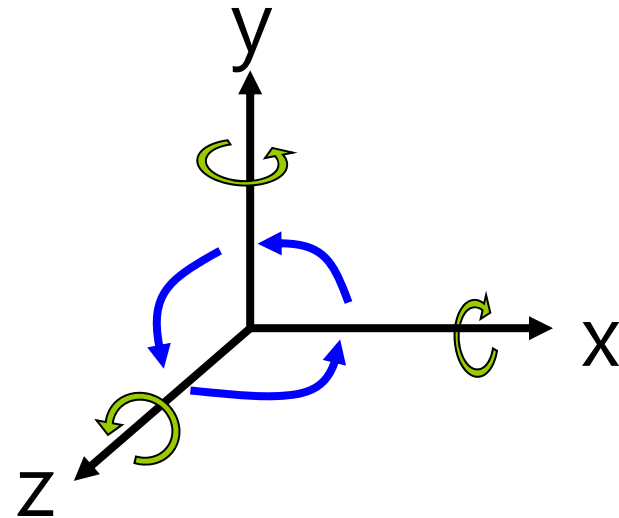

# Matrix Operations

---

## □ OpenGL Matrix

- The elements of the 4x4 matrix M must be specified in **column-major order**.

$$p' = M * p = \begin{pmatrix} m_0 & m_4 & m_8 & m_{12} \\ m_1 & m_5 & m_9 & m_{13} \\ m_2 & m_6 & m_{10} & m_{14} \\ m_3 & m_7 & m_{11} & m_{15} \end{pmatrix} \begin{pmatrix} v_0 \\ v_1 \\ v_2 \\ v_3 \end{pmatrix}$$

# Translation


---

## □ Translation

- Move points by the translation factor (dx, dy, dz)
- 2D translation uses dz = 0.0

```
glm::mat4 T = glm::translate(glm::mat4(1.0f), glm::vec3(0.5f, -0.2f, 0));
```

$$p' = Tp \quad T = \begin{bmatrix} 1 & 0 & 0 & dx \\ 0 & 1 & 0 & dy \\ 0 & 0 & 1 & dz \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

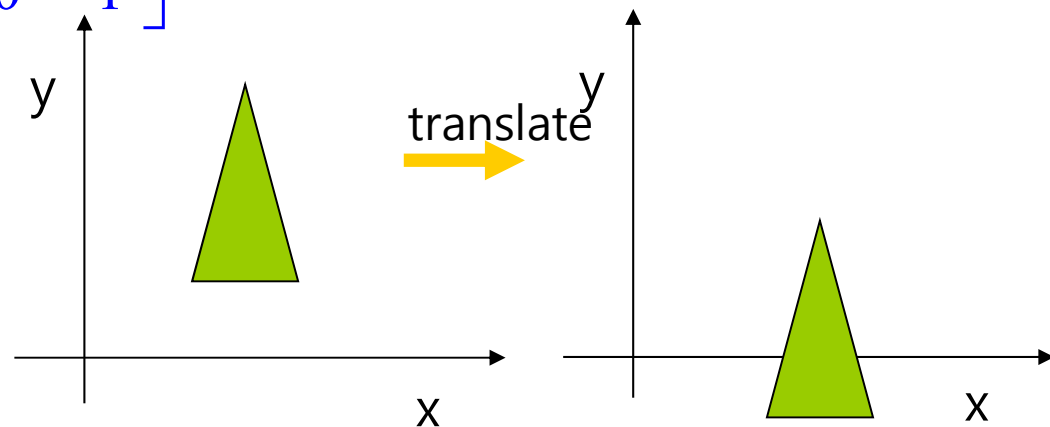

# Rotation

---

## □ Rotation

- Rotate by angle around the arbitrary axis (x,y,z) (OpenGL uses degree & glm uses radian)
- 2D rotation is used as the z-axis (0, 0, 1) rotation.

```
glm::mat4 Rx = glm::rotate(glm::mat4(1.0f), 30.0f, glm::vec3(1, 0, 0));
```

```
glm::mat4 Ry = glm::rotate(glm::mat4(1.0f), 60.0f, glm::vec3(0, 1, 0));
```

```
glm::mat4 Rz = glm::rotate(glm::mat4(1.0f), 45.0f, glm::vec3(0, 0, 1));
```

```
glm::mat4 Ra = glm::rotate(glm::mat4(1.0f), 45.0f, glm::vec3(1, 1, 1));
```


# Rotation

---

$$p' = R_x p \quad R_x = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta & 0 \\ 0 & \sin \theta & \cos \theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$p' = R_y p \quad R_y = \begin{bmatrix} \cos \theta & 0 & \sin \theta & 0 \\ 0 & 1 & 0 & 0 \\ -\sin \theta & 0 & \cos \theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$p' = R_z p \quad R_z = \begin{bmatrix} \cos \theta & -\sin \theta & 0 & 0 \\ \sin \theta & \cos \theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

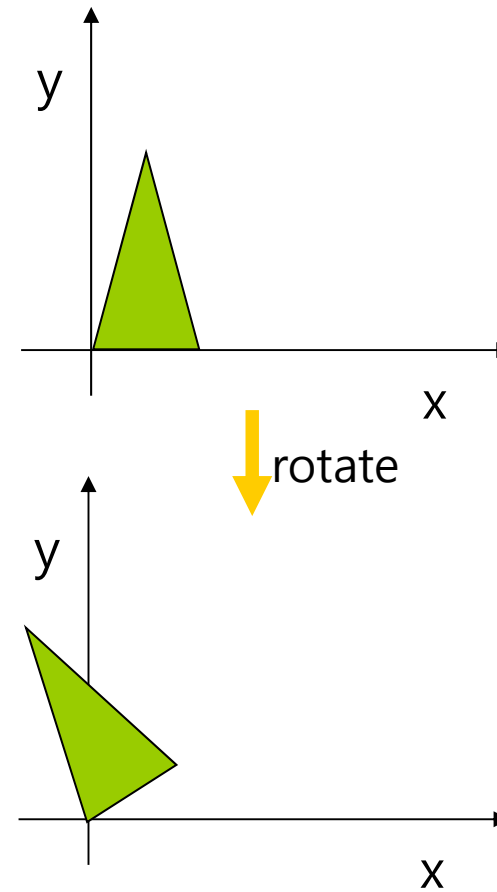


# Scale

## □ Scale

- Transform the size by  $s_x$  on the x-axis,  $s_y$  on the y-axis,  $s_z$  on the z-axis.
- If the scale factor  $> 1$ , it scales up. If  $0 < \text{scale factor} \leq 1$ , it scales down. If the scale factor  $< 0$ , it becomes reflection.
- 2D scaling uses  $z=1$ .

`glm::mat4 S = glm::scale(glm::mat4(1.0f), glm::ve`

$$p' = Sp \quad S = \begin{bmatrix} s_x & 0 & 0 & 0 \\ 0 & s_y & 0 & 0 \\ 0 & 0 & s_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

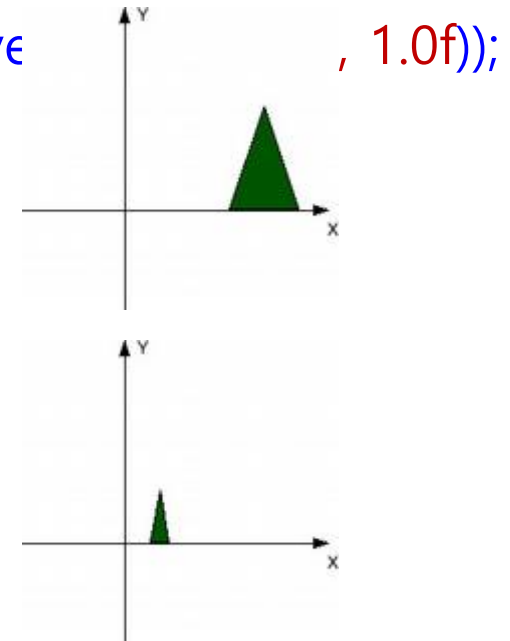


# Transformation Order

- In OpenGL, modeling transformation matrices are applied in the reverse order set on the object.


```
glm::mat4 Tx = glm::translate(glm::mat4(1.0f), glm::vec3(0.5, 0, 0));  
glm::mat4 Rz = glm::rotate(glm::mat4(1.0f), 45, glm::vec3(0, 0, 1));
```

```
glm::mat4 TR = Tx * Rz; // rotate first, translate later  
drawTriangle(TR);
```

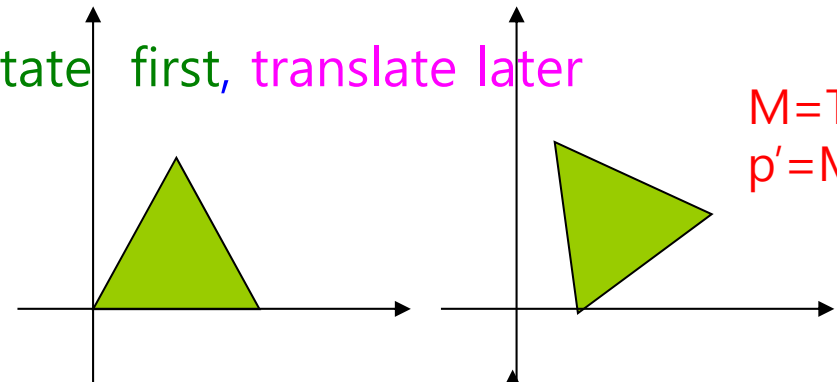

$M = T * R$   
 $p' = Mp$

```
glm::mat4 RT = Rz * Tx; // translate first, rotate later  
drawTriangle(RT);
```

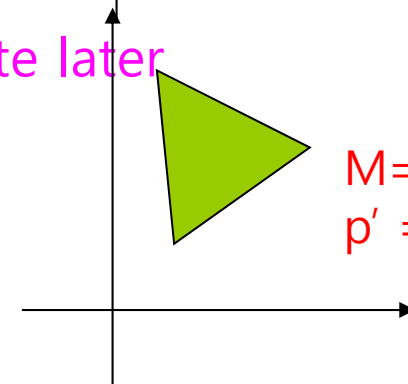

$M = R * T$   
 $p' = Mp$



# Transformation Order

---


```
glm::mat4 T = glm::translate(glm::mat4(1.0f), glm::vec3(1.5f, 0.0f, 0.0f));  
glm::mat4 R = glm::rotate(glm::mat4(1.0f), 45.0f, glm::vec3(0.0f, 0.0f, 1.0f));  
glm::mat4 S = glm::scale(glm::mat4(1.0f), glm::vec3(0.5f, 0.7f, 1.0f));
```

```
drawCube();
```

```
glm::mat4 RT = R * T; // p' = R * T * p (red)  
drawCube();
```

```
glm::mat4 TR = T * R; // p' = T * R * p (green)  
drawCube();
```


```
glm::mat4 TRS = T * R * S; // p' = T * R * S * p (blue)  
drawCube();
```

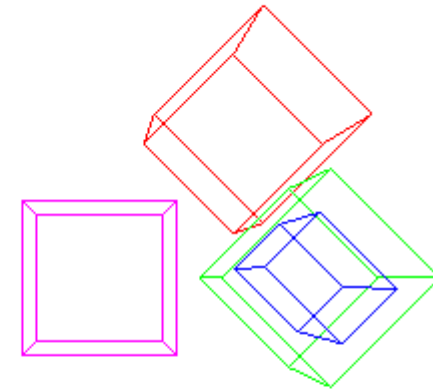

# Hierarchical Transformations

---


- ❑ Hierarchical transformation can be thought of as belonging to another transformation.
- ❑ Hierarchical transformation is used as transformation of one object relative to other objects.
- ❑ For example, a car hierarchical transformation with a body and two wheels:
  - Apply body transformation
  - Draw body
  - Save state
  - Apply front wheel transformation
  - Draw wheel
  - Restore saved state
  - Apply rear wheel transformation
  - Draw wheel

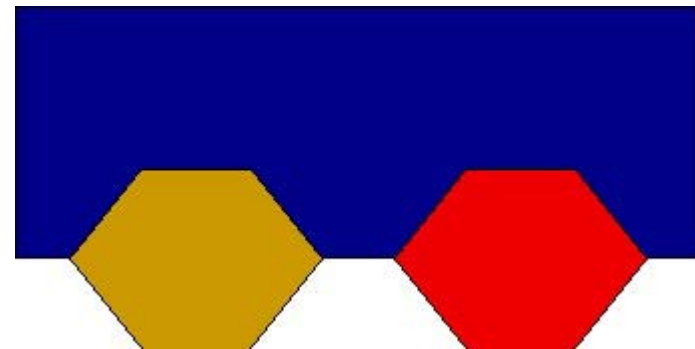

# Hierarchical Transformations

---

- ❑ In addition, it can be seen that when the car moves, the two wheels located in relative positions on the car body also move with the body.
- ❑ The two wheels are made to be affected by the transformation of the car body, and the wheels are not transformed separately.

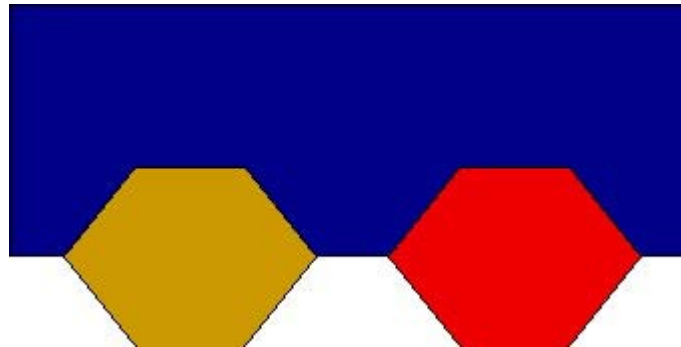

# Example: Car



---

```
bodyTransform = glm::translate(glm::mat4(1.0f), position); // car position
wheelMatrix = MVP * bodyTransform;
body.draw();
wheelTransform[0] = glm::translate(glm::mat4(1.0f), glm::vec3(-0.5f, 0.0f, -0.5f)) *
    glm::rotate(glm::mat4(1.0f), angle, glm::vec3(0.0f, 0.0f, 1.0f));
wheelMatrix = MVP * bodyTransform * wheelTransform[0];
wheel.draw();
wheelTransform[1] = glm::translate(glm::mat4(1.0f), glm::vec3(-0.5f, 0.0f, 0.5f)) *
    glm::rotate(glm::mat4(1.0f), angle, glm::vec3(0.0f, 0.0f, 1.0f));
wheelMatrix = MVP * bodyTransform * wheelTransform[1];
wheel.draw();
wheelTransform[2] = glm::translate(glm::mat4(1.0f), glm::vec3( 0.5f, 0.0f, -0.5f)) *
    glm::rotate(glm::mat4(1.0f), angle, glm::vec3(0.0f, 0.0f, 1.0f));
wheelMatrix = MVP * bodyTransform * wheelTransform[2];
wheel.draw();
wheelTransform[3] = glm::translate(glm::mat4(1.0f), glm::vec3( 0.5f, 0.0f, 0.5f)) *
    glm::rotate(glm::mat4(1.0f), angle, glm::vec3(0.0f, 0.0f, 1.0f));
wheelMatrix = MVP * bodyTransform * wheelTransform[3];
wheel.draw();
```

# Transformation Hierarchy

---

- ❑ Hierarchical transformations are often expressed as a tree structure of transformations.
- ❑ To design a three-dimensional character, we use a hierarchical transformation made of rigid body parts.
- ❑ For more flexible 3D character design, a number of hierarchical transformations should be properly mixed.
- ❑ These layers are the same as the basis for the scene graph.

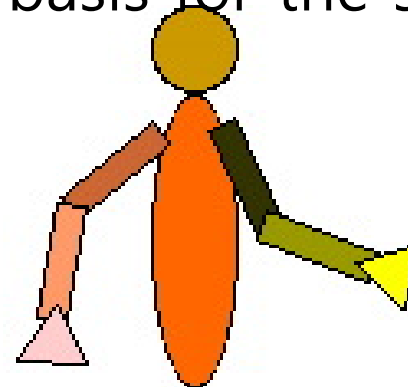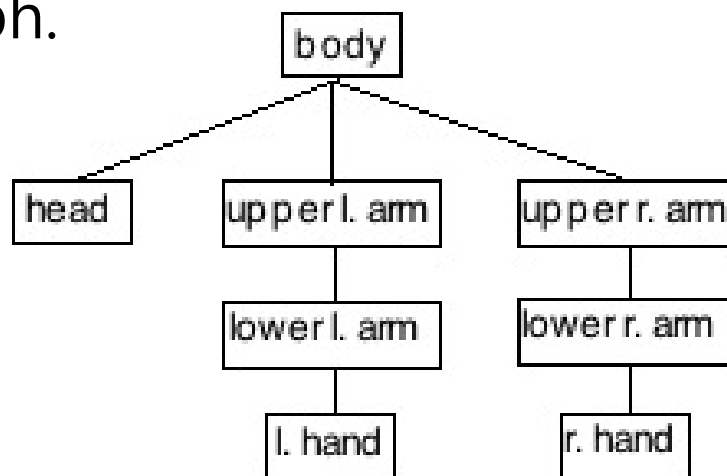


# Example: Robot

---

```
void SimpleRobot::draw(glm::mat4 MVP)
{
// base
glm::mat4 baseMatrix =
    MVP * baseTransform;
base.draw();

// lowerArm
glm::mat4 lowerArmMatrix =
    MVP * baseTransform * lowerArmTransform;
arm.draw();

// upperArm
glm::mat4 upperArmMatrix =
    MVP * baseTransform * lowerArmTransform * upperArmTransform;
arm.draw();
}
```

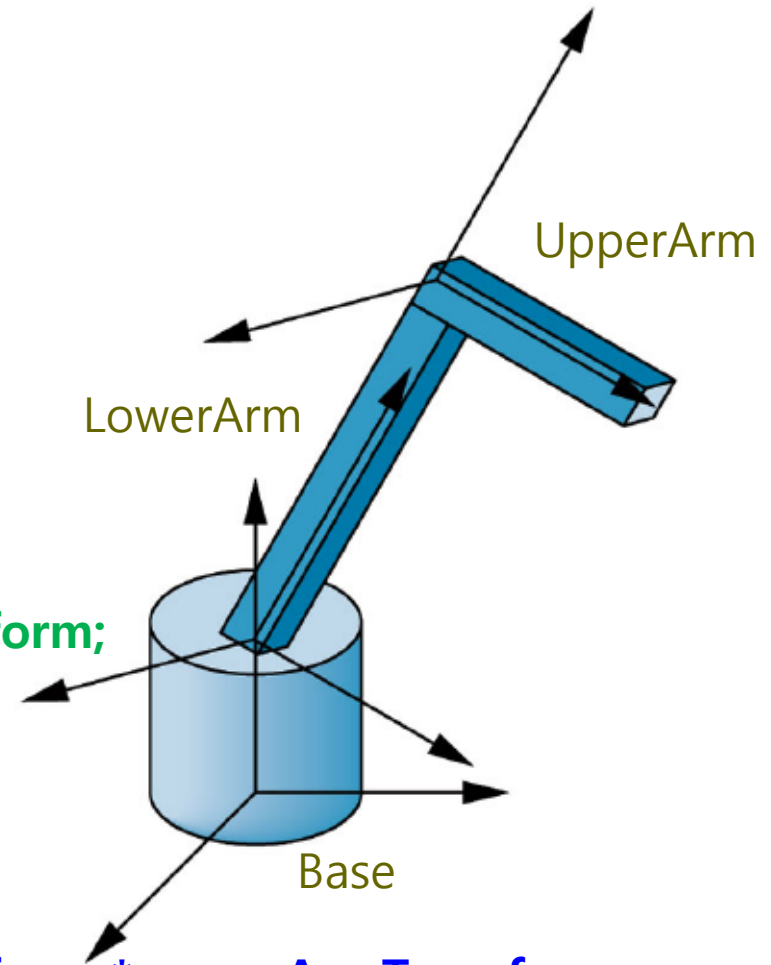

# Example: Robot

---


```
SimpleRobot::SimpleRobot(Program* p_) {
    theta = 0.0f; phi = 0.0f; psi = 0.0f; // base, lower/upper arm rotation
    base = Cylinder(2.0f, 3.0f, 16);
    arm = Parallelepiped(glm::vec3(-0.25f, 0.0f, -0.25f), glm::vec3(0.5f, 0.0f,
        0.0f), glm::vec3(0.0f, 0.0f, 0.5f), glm::vec3(0.0f, 3.0f, 0.0f));
}

bool SimpleRobot::update(float deltaTime) {
    baseTransform = glm::translate(glm::mat4(1.0f), glm::vec3(0.0f, -1.5f,
        0.0f)) * glm::rotate(glm::mat4(1.0f), theta, glm::vec3(0.0f, 1.0f, 0.0f));
    lowerArmTransform = glm::translate(glm::mat4(1.0f), glm::vec3(0.0f,
        1.5f, 0.0f)) * glm::rotate(glm::mat4(1.0f), phi, glm::vec3(0.0f, 0.0f, 1.0f));
    upperArmTransform = glm::translate(glm::mat4(1.0f), glm::vec3(0.0f,
        3.0f, 0.0f)) * glm::scale(glm::mat4(1.0f), glm::vec3(1.0f, 0.5f, 1.0f)) *
        glm::rotate(glm::mat4(1.0f), psi, glm::vec3(0.0f, 0.0f, 1.0f));
    return true;
}
```

# Example: Solar

```
const float SimpleSolar::SunRadius = 4.0f;  
const float SimpleSolar::EarthRadius = 1.0f;  
const float SimpleSolar::MoonRadius = 0.5f;  
const float SimpleSolar::EarthDistanceFromSun = 10.0f;  
const float SimpleSolar::MoonDistanceFromEarth = 2.0f;
```

```
SimpleSolar::SimpleSolar(Program* p_)  
{  
    p = p_;  
    sunSpin = 0.0f;// sun spin  
    earthSpin = 0.0f;// earth spin  
    earthOrbit = 0.0f;// earth orbit around the sun  
    moonSpin = 0.0f;// moon spin  
    moonOrbit = 0.0f;// moon orbit around the earth  
    sun = Sphere(SunRadius, 16, 16);  
    earth = Sphere(EarthRadius, 16, 16);  
    moon = Sphere(MoonRadius, 16, 16);  
}
```

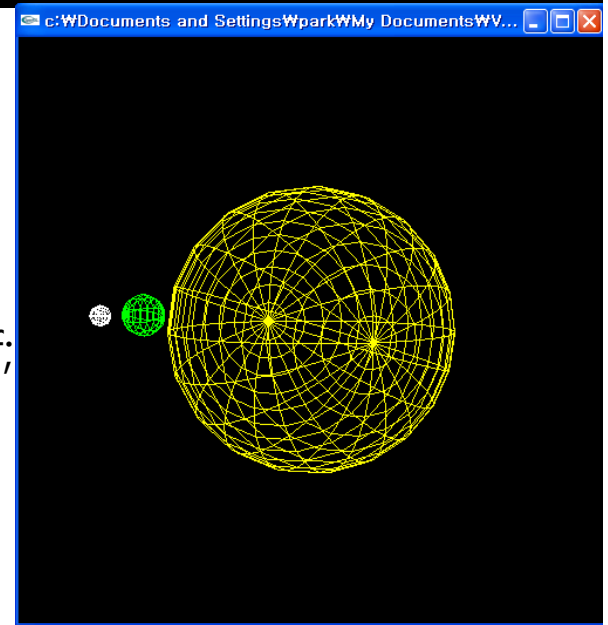



# Example: Solar

---

```
bool SimpleSolar::update(float deltaTime)
{
    // The Sun spins by rotating it about y-axis
    sunSpin += (float) (deltaTime) * 0.01f;
    sunTransform = glm::rotate(glm::mat4(1.0f), sunSpin, glm::vec3(0.0f, 1.0f,
        0.0f));

    // The Earth spins on its own axis and orbits the Sun
    earthSpin += (float) (deltaTime) * 0.05f;
    earthOrbit += (float) (deltaTime) * 0.01f;
    earthTransform = glm::rotate(glm::mat4(1.0f), earthOrbit, glm::vec3(0.0f,
        1.0f, 0.0f))
        * glm::translate(glm::mat4(1.0f), glm::vec3(0.0f, 0.0f,
            EarthDistanceFromSun))
        * glm::rotate(glm::mat4(1.0f), earthSpin, glm::vec3(0.0f, 1.0f, 0.0f));
```

# Example: Solar

---

```
// The Moon spins on its own axis and orbits the Earth (that orbits the Sun)
moonSpin += (float) (deltaTime) * 0.07f;
moonOrbit += (float) (deltaTime) * 0.08f;
moonTransform = glm::rotate(glm::mat4(1.0f), earthOrbit, glm::vec3(0.0f,
    1.0f, 0.0f))
* glm::translate(glm::mat4(1.0f), glm::vec3(0.0f, 0.0f,
    EarthDistanceFromSun))
* glm::rotate(glm::mat4(1.0f), moonOrbit, glm::vec3(0.0f, 1.0f, 0.0f))
* glm::translate(glm::mat4(1.0f), glm::vec3(0.0f, 0.0f,
    MoonDistanceFromEarth))
* glm::rotate(glm::mat4(1.0f), moonSpin, glm::vec3(0.0f, 1.0f, 0.0f));

return true;
}
```

# Example: Solar

---

```
void SimpleSolar::draw(glm::mat4 MVP) {
    glm::mat4 sunMatrix = MVP * sunTransform;
    p->useProgram();
    p->setUniform("gMVP", sunMatrix);
    glVertexAttrib3f(1, 1, 1, 0); // yellow - sun
    sun.draw();


    glm::mat4 earthMatrix = MVP * earthTransform;
    p->useProgram();
    p->setUniform("gMVP", earthMatrix);
    glVertexAttrib3f(1, 0, 1, 0); // green - earth
    earth.draw();

    glm::mat4 moonMatrix = MVP * moonTransform;
    p->useProgram();
    p->setUniform("gMVP", moonMatrix);
    glVertexAttrib3f(1, 0.5, 0.5, 0.5); // gray - moon
    moon.draw();
}
```

# Modeling a Cube

---

- In OpenGL, the winding order of vertices  $\{v_0, v_3, v_2, v_1\}$  and  $\{v_1, v_0, v_3, v_2\}$  creates the same polygon. However, the vertex winding order  $\{v_1, v_2, v_3, v_0\}$  is different.
- Since OpenGL uses the right-handed coordinate system, if a vertex is defined with a counter-clockwise encirclement, it creates a normal vector facing outward.

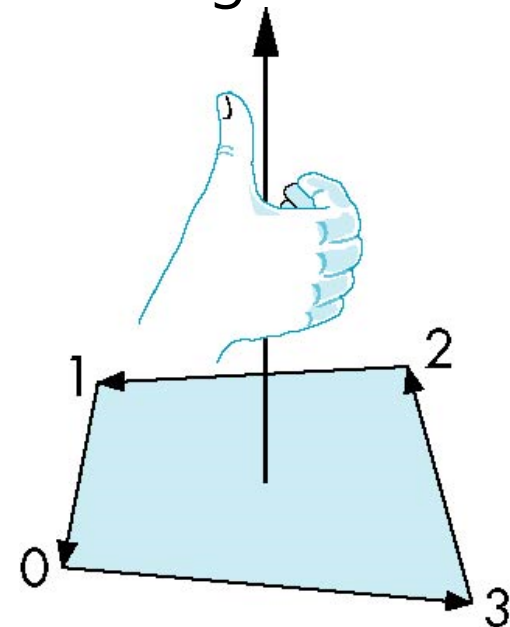


# Modeling a Cube

- Draw a cube using the vertex list and the index list.

```
GLfloat cubeVertices[][3] = {  
    {-1.0,-1.0,-1.0},    { 1.0,-1.0,-1.0},  
    { 1.0, 1.0,-1.0},    {-1.0, 1.0,-1.0},  
    {-1.0,-1.0, 1.0},    { 1.0,-1.0, 1.0},  
    { 1.0, 1.0, 1.0},    {-1.0, 1.0, 1.0}  
};
```


```
GLfloat cubeNormals[][3] = {  
    { 0.0, 0.0, 1.0},    // front  
    { 0.0, 0.0, -1.0},   // back  
    {-1.0, 0.0, 0.0},    // left  
    { 1.0, 0.0, 0.0},    // right  
    { 0.0, 1.0, 0.0},    // top  
    { 0.0, -1.0, 0.0},   // bottom  
};
```

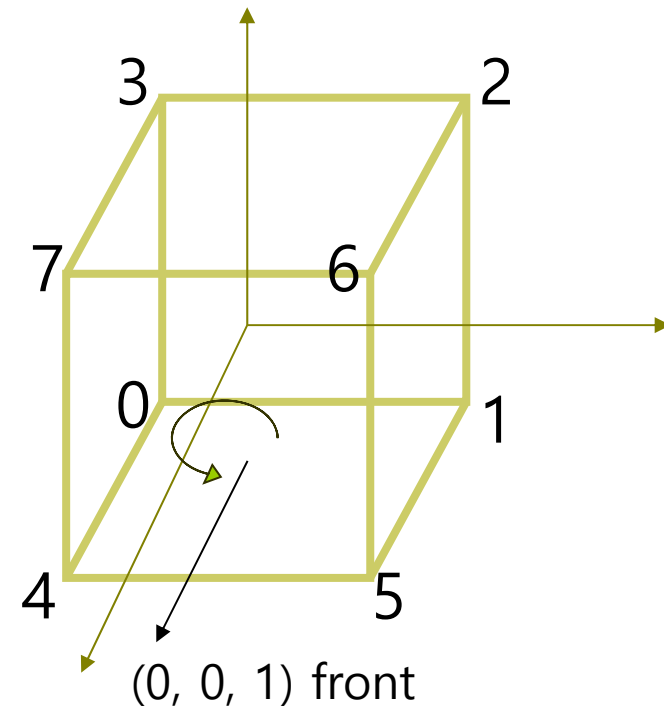

# Modeling a Cube

---

```
GLint cubeIndices[] = {  
    4, 5, 6, 4, 6, 7, // front  
    1, 0, 3, 1, 3, 2, // back  
    0, 4, 7, 0, 7, 3, // left  
    5, 1, 2, 5, 2, 6, // right  
    7, 6, 2, 7, 2, 3, // top  
    0, 1, 5, 0, 5, 4 // bottom  
};
```

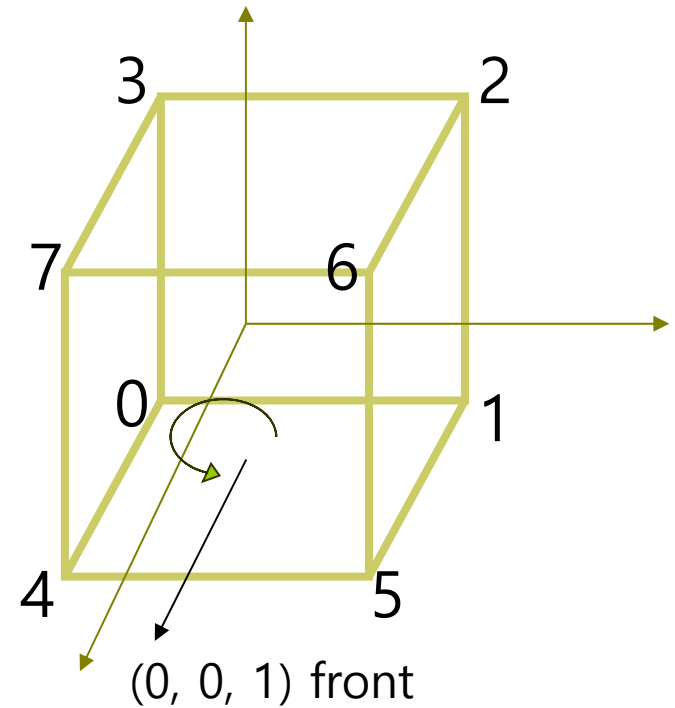

# Model Files

---

- 3D model types
  - Wavefront (.obj)
  - Inventor (.iv)
  - VRML / X3D
  - 3D Studio (.3ds)
  - OpenFlight (.flt)
  - ...
- The 3D object model contains the following:
  - Geometry data – vertex positions, faces
  - Colors/material properties
  - Textures
  - Transformations

# Wavefront OBJ Files

---

- An OBJ file is a plain text file that contains vertices, polygon faces, materials, and many other information.
- Each line starts with a token that tells us what kind of information it has, such as vertex, normal vector, and texture.
  - `v x y z`
    - Vertex position
  - `vn x y z`
    - Vertex normal
  - `vt u v`
    - texture coordinate
  - `f v1 v2 v3 ..`
    - Face (list of vertex numbers)
  - `Mtllib file.mtl`
    - File containing material descriptions
  - `Usemtl name`
    - Current material to apply to geometry